

Trolley for Large Load Containers

Suitable for Jungheinrich trailers

Available in several sizes and load capacities

Unique trailer design allows for more precise lane guidance

Trolley's lifting platform makes loading / unloading trailers easier, while saving time



RW 0.6T & 1.2T Trolley for GTE Trailers

1,300 / 2,600 lbs.

Trolleys are used to transport Large Load Containers (LLC) in a tow train, such as pallets or bulk containers. In order to be able to handle LLCs at a destination without the use of additional equipment, it is possible to move the LLC manually with the trolleys. The trolleys are precisely matched to the Jungheinrich GTE trailers.

The LLCs are placed on the trolleys, pushed into the trailers and mechanically locked. During travel, the trolleys are raised by the trailer so that they do not roll on their own wheels.

The RW Trolleys for GTE have the following advantages:

- **Low roll resistance:** The trolley wheels have optimized roll resistance due to the ball bearings and hard treads. The trolley wheels have been optimized for low rolling resistance due to the ball bearings and hard tread. This helps when manually moving the trolley.
- **Quiet operation:** Trolleys designed with hard rollers can be loud and wear quickly. The Jungheinrich trolleys feature a smooth and durable design that not only last, but are also very quiet.

- **Precise lane guidance:** The frame of the trailer allows for more precise lane guidance. In contrast, trolleys with four steering rollers require external guidance.
- **Easy to use:** Thanks to their lifting platform, the GTE trailers also allow for the easy loading and unloading of the trolleys.

The Jungheinrich trolleys are designed to work in tandem with the GTE tow train trailers to provide customers with a productive, reliable and smooth method of transporting multiple loads of goods simultaneously.

**JUNGHEINRICH®**



Technical data

as of: 08/2018

Characteristics	1.1				Jungheinrich											
	1.2				RW 0,6t 47.2 x 31.5		RW 0,6t 47.2 x 39.4		RW 1,2t 47.2 x 31.5		RW 1,2t 47.2 x 39.4					
Weights	1.3				manual		manual		manual		manual					
	Weights	1.5				Q	lb	kg	1,300	600	1,300	600	2,600	1,200	2,600	1,200
1.9				y	in	mm	35.8	910	35.8	910	35.8	910	35.8	910		
Weights	2.1					lb	kg	99.2	45	105.8	48	79.4	36	83.8	38	
Wheels, Chassis	3.1				Nylon		Nylon		Nylon		Nylon					
	3.2				in	mm	∅ 6.9 x 1.9	∅ 175 x 48	∅ 6.9 x 1.9	∅ 175 x 48	∅ 6.9 x 1.9	∅ 175 x 48	∅ 6.9 x 1.9	∅ 175 x 48	∅ 6.9 x 1.9	∅ 175 x 48
Wheels, Chassis	3.3				in	mm	∅ 6.9 x 1.9	∅ 175 x 48	∅ 6.9 x 1.9	∅ 175 x 48	∅ 6.9 x 1.9	∅ 175 x 48	∅ 6.9 x 1.9	∅ 175 x 48	∅ 6.9 x 1.9	∅ 175 x 48
	3.5				2 / 2		2 / 2		2 / 2		2 / 2					
Wheels, Chassis	3.6				b ₁₀	in	mm	23.7	603	31.6	803	23.7	603	31.6	803	
Dimensions	4.2.1				h ₁₅	in	mm	13.8	351	13.8	351	13.8	351	13.8	351	
	4.13				h ₁₁	in	mm	11.0	280	11.0	280	11.0	280	11.0	280	
Dimensions	4.18				b ₉	in	mm	31.9	810	39.8	1,010	31.9	810	39.8	1,010	
	4.19				l ₁	in	mm	49.4	1,255	49.4	1,255	49.4	1,255	49.4	1,255	
Dimensions	4.21				b ₁	in	mm	33.7	855	41.5	1,055	33.7	855	41.5	1,055	
	4.32				m ₂	in	mm	9.3	235	9.3	235	9.3	235	9.3	235	
Performance	4.38.12				l ₃	in	mm	47.6	1,210	47.6	1,210	47.6	1,210	47.6	1,210	
Performance	5.10				optional		optional		optional		optional					

This specification sheet only provides technical values for the standard truck. Non-standard tires, different masts, additional equipment, etc., could produce other values. Rights reserved for technical changes and improvements.

RW 0.6 & 1.2 Trolleys for GTE

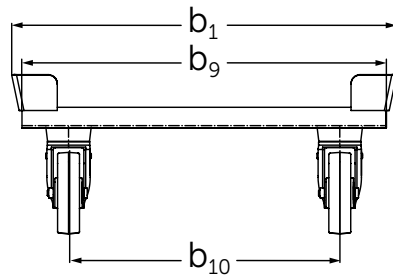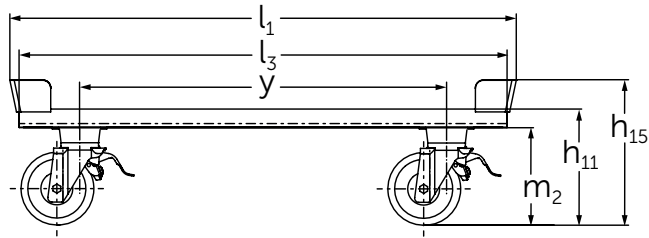

The Jungheinrich Advantage



Available in several sizes and load capacities



Optional handle bar for increased height

Design Features

- 4 steering rollers, two with diagonal wheel locks.
- Large wheels made of polyamide with ball bearings for easy manual handling.
- Electrostatic Discharge wheel with electrical conductivity.
- Frame in Jungheinrich gray to match the complete Jungheinrich tow tractor line.

Ergonomic Design

There are various options that ease the handling of heavy and awkward loads:

- Attachable handles allows operators to comfortably grip at the trolley and work at an ergonomic height.
- Lockable steering roller provides directional stability when pushing manually.
- Optional beam extensions make it easier to access loads without having to bend over.

Options

- Loads for 1,300 / 2,600 lbs.
- Dimensions in 47.2" X 31.5" and 47.2" X 39.4".
- Clip-on push handle.
- Parking brake with fixed brake pedal.
- Locking rollers for easier handling of heavy loads.
- Beam extension for ergonomic unloading of large load carriers.
- Wooden floor with rubber mat to allow smaller loads to be transported securely.
- Various color options available.

Parts when you need them

Jungheinrich's Parts Fast or Parts Free Guarantee ensures next-business-day delivery by 5:00 PM of all Jungheinrich parts in the United States, or they're free, including freight. For customers in Canada and Mexico, the guarantee ensures shipping of parts within 24 hours from the time the order was placed by the dealer. See your local Jungheinrich dealer for program details.

* Programs may be subject to change without notice and may vary by region. Please ask your local Jungheinrich dealer for complete terms and conditions.